


127/230(245)kV

Power cable for distribution, infrastructure and industrial supply

127/230(245)kV is prepared for preliminary product selection and quotation review. This product is used for power distribution and project supply where voltage grade, conductor size, insulation system and installation condition determine the cable selection. Parameters should be reviewed against the selected standard and project specification.

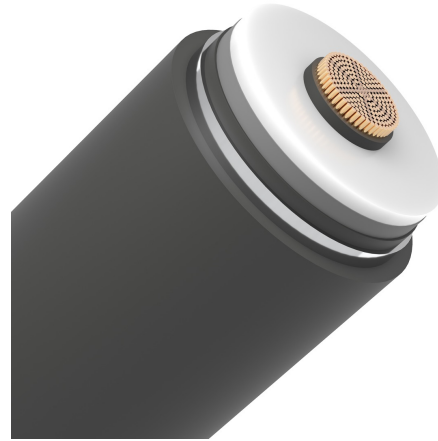

VOLTAGE

127/230kV, 245kV

CONDUCTOR

Copper conductor route,
confirmed by technical table

TYPICAL USE

Power distribution networks

STANDARDS

IEC 62067; GB/T 18890

DATA SCOPE

2 technical table(s) included
for preliminary selection

SELECTION NOTE

Confirm voltage, conductor,
armour, sheath and
installation route.

Preliminary Reference Notice

For preliminary selection only. All technical parameters, dimensions and electrical data in this document are typical reference values based on common standard samples. They do not constitute a binding engineering supply commitment. For formal quotation or project submission, Farwalk will review the required voltage grade, installation environment, cable construction, local standards and project specifications, then provide a customized technical proposal and commercial offer.

Application & Selection Summary

Typical applications

- Power distribution networks
- industrial plants
- infrastructure projects
- underground or indoor power supply routes
- renewable energy and utility projects requiring project-based cable review.

Selection logic

- Confirm voltage grade, conductor material, armour requirement, insulation/sheath material, installation environment and applicable standard before quotation or production confirmation.

Construction Overview

Item	Website-ready content
Product route	Copper or aluminum conductor with insulation, bedding, optional armour and outer sheath according to product type and project requirement.
Voltage	127/230kV, 245kV
Conductor	Copper conductor route, confirmed by technical table
Standards	IEC 62067; GB/T 18890
Confirmation	Final structure, dimensions and packing should follow selected standard, quotation review and order specification.

Readable Data Index

Data route	Size / rating range	Construction	Diameter / OD	Resistance / weight / rating
1 Core - Cu / EHV XLPE / Corrugated Al / HDPE (127/230kV)	1 x 400 - 1 x 2500 (Milliken)	See table	100.5 - 148.8	9500 - 35500
1 Core - Cu / EHV XLPE / Lead Sheath / HDPE (127/230kV)	1 x 400 - 1 x 2500 (Milliken)	See table	102.5 - 152.2	16000 - 51500

For preliminary selection only. All technical parameters, dimensions and electrical data in this document are typical reference values based on common standard samples. They do not constitute a binding engineering supply commitment. For formal quotation or project submission, Farwalk will review the required voltage grade, installation environment, cable construction, local standards and project specifications, then provide a customized technical proposal and commercial offer.

1 Core - Cu / EHV XLPE / Corrugated Al / HDPE (127/230kV)

Reference table for preliminary selection and quotation review.

Area (mm ²)	Nom. XLPE Thick. (mm)	CAS Thick. (mm)	Approx OD (mm)	Weight (kg/km)
1 Core - Cu / EHV XLPE / Corrugated Al / HDPE (127/230kV)				
1 x 400	24.0	1.8	100.5	9500
1 x 500	24.0	1.8	104.2	10800
1 x 630	24.0	2.0	108.5	12600
1 x 800	24.0	2.0	114.8	14800
1 x 1000 (Milliken)	24.0	2.2	118.5	17500
1 x 1200 (Milliken)	24.0	2.2	124.2	19800
1 x 1600 (Milliken)	24.0	2.5	132.5	24500
1 x 2000 (Milliken)	24.0	2.5	140.5	29800
1 x 2500 (Milliken)	24.0	2.5	148.8	35500

1 Core - Cu / EHV XLPE / Lead Sheath / HDPE (127/230kV)

Reference table for preliminary selection and quotation review.

Area (mm ²)	Nom. XLPE Thick. (mm)	Lead Thick. (mm)	Approx OD (mm)	Weight (kg/km)
1 Core - Cu / EHV XLPE / Lead Sheath / HDPE (127/230kV)				
1 x 400	24.0	2.4	102.5	16000
1 x 500	24.0	2.4	106.8	17500
1 x 630	24.0	2.6	110.5	19800
1 x 800	24.0	2.6	116.2	22500
1 x 1000 (Milliken)	24.0	2.8	120.5	26500
1 x 1200 (Milliken)	24.0	2.8	126.8	29500
1 x 1600 (Milliken)	24.0	3.0	136.5	36500
1 x 2000 (Milliken)	24.0	3.2	144.5	43500
1 x 2500 (Milliken)	24.0	3.2	152.2	51500