


25 kV Concentric Cable

Concentric cable for service entrance and utility distribution review

25 kV Concentric Cable is prepared for preliminary product selection and quotation review. This product is used for low or medium voltage service connections and utility distribution where concentric neutral or earth construction is required. Cable structure, conductor material, insulation level and applicable standard should be reviewed according to the project route.

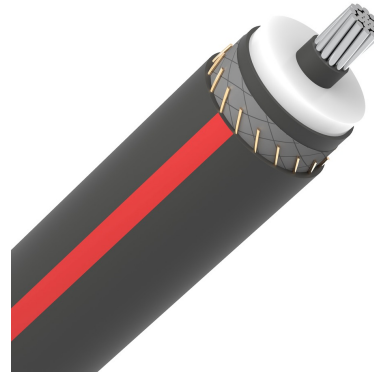

VOLTAGE

15.2/25kV

CONDUCTOR

Copper conductor route, confirmed by technical table

TYPICAL USE

Service entrance connections

STANDARDS

ICEA S-94-649; UL 1072

DATA SCOPE

2 technical table(s) included for preliminary selection

SELECTION NOTE

Confirm voltage, conductor, neutral/earth arrangement, sheath and installation route.

For quotation review, provide cable type, standard, size, quantity and project destination.

ethan@farwalkcable.com | +86 155 5800 6344

Application & Selection Summary

Typical applications

- Service entrance connections
- utility distribution networks
- overhead or underground service routes
- projects requiring concentric neutral or earth cable construction.

Selection logic

- Confirm voltage grade, conductor material, concentric neutral or earth arrangement, installation route and required standard.
- For utility projects, local grid practice and tender documents should be checked before final selection.

Construction Overview

Item	Website-ready content
Product route	Phase conductor with insulation and concentric neutral/earth wires or screen arrangement. Outer sheath and detailed structure depend on the project standard and product type.
Voltage	15.2/25kV
Conductor	Copper conductor route, confirmed by technical table
Standards	ICEA S-94-649; UL 1072
Confirmation	Final structure, dimensions and packing should follow selected standard, quotation review and order specification.

Readable Data Index

Data route	Size / rating range	Construction	Diameter / OD	Resistance / weight / rating
ICEA S-94-649 - 25kV URD (AI Phase + 1/3 Copper Concentric	1/0 AWG - 1000 MCM	6 x 14 AWG - 32 x 12 AWG	1.36 / 34.5 - 2.25 / 57.1	670 / 997 - 2950 / 4389
ICEA S-94-649 - 25kV URD (AI Phase + 1/3 Copper Concentric	1/0 AWG - 1000 MCM	6 x 14 AWG - 32 x 12 AWG	1.48 / 37.6 - 2.37 / 60.2	760 / 1131 - 3120 / 4642

Data boundary: these tables support website launch, quotation review and preliminary product selection. For project execution, final dimensions, electrical performance, packing and compliance documents should be confirmed against the selected project standard and order specification.

ICEA S-94-649 - 25kV URD (AI Phase + 1/3 Copper Concentric Neutral)

Reference table for preliminary selection and quotation review.

Phase Size (AWG/MCM)	Insulation Thickness (mils / mm)	Concentric Neutral Wires (No. x AWG)	Approx. Overall Dia. (in / mm)	Approx. Weight (lbs/1000ft / kg/km)	Allowable Ampacity (Direct Burial)*
ICEA S-94-649 - 25kV URD (AI Phase + 1/3 Copper Concentric Neutral)					
1/0 AWG	260 / 6.60	6 x 14 AWG	1.36 / 34.5	670 / 997	215 A
2/0 AWG	260 / 6.60	7 x 14 AWG	1.41 / 35.8	740 / 1101	245 A
3/0 AWG	260 / 6.60	9 x 14 AWG	1.46 / 37.1	835 / 1242	275 A
4/0 AWG	260 / 6.60	11 x 14 AWG	1.52 / 38.6	960 / 1428	315 A
250 MCM	260 / 6.60	13 x 14 AWG	1.58 / 40.1	1080 / 1607	350 A
350 MCM	260 / 6.60	12 x 12 AWG	1.69 / 42.9	1340 / 1994	420 A
500 MCM	260 / 6.60	16 x 12 AWG	1.85 / 47.0	1750 / 2604	510 A
750 MCM	260 / 6.60	24 x 12 AWG	2.05 / 52.1	2380 / 3541	630 A
1000 MCM	260 / 6.60	32 x 12 AWG	2.25 / 57.1	2950 / 4389	730 A

ICEA S-94-649 - 25kV URD (AI Phase + 1/3 Copper Concentric Neutral)

Reference table for preliminary selection and quotation review.

Phase Size (AWG/MCM)	Insulation Thickness (mils / mm)	Concentric Neutral Wires (No. x AWG)	Approx. Overall Dia. (in / mm)	Approx. Weight (lbs/1000ft / kg/km)	Allowable Ampacity (Direct Burial)*
ICEA S-94-649 - 25kV URD (AI Phase + 1/3 Copper Concentric Neutral)					
1/0 AWG	320 / 8.13	6 x 14 AWG	1.48 / 37.6	760 / 1131	210 A
2/0 AWG	320 / 8.13	7 x 14 AWG	1.53 / 38.9	835 / 1242	240 A
3/0 AWG	320 / 8.13	9 x 14 AWG	1.58 / 40.1	935 / 1391	270 A
4/0 AWG	320 / 8.13	11 x 14 AWG	1.64 / 41.7	1060 / 1577	310 A
250 MCM	320 / 8.13	13 x 14 AWG	1.70 / 43.2	1190 / 1770	340 A
350 MCM	320 / 8.13	12 x 12 AWG	1.81 / 46.0	1460 / 2172	410 A
500 MCM	320 / 8.13	16 x 12 AWG	1.97 / 50.0	1880 / 2797	500 A
750 MCM	320 / 8.13	24 x 12 AWG	2.17 / 55.1	2520 / 3750	610 A
1000 MCM	320 / 8.13	32 x 12 AWG	2.37 / 60.2	3120 / 4642	715 A