


8.7/15(17.5)kV

Power cable for distribution, infrastructure and industrial supply

8.7/15(17.5)kV is prepared for preliminary product selection and quotation review. This product is used for power distribution and project supply where voltage grade, conductor size, insulation system and installation condition determine the cable selection. Parameters should be reviewed against the selected standard and project specification.

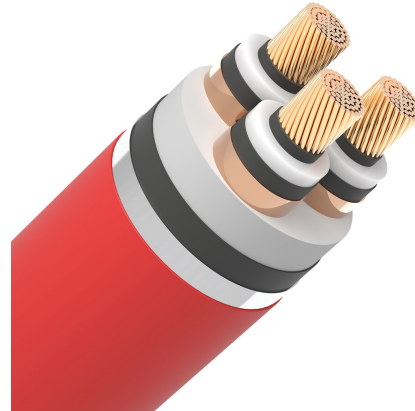

VOLTAGE

8.7/15kV, 17.5kV

CONDUCTOR

Copper conductor route,
confirmed by technical table

TYPICAL USE

Power distribution networks

STANDARDS

IEC 60502-2; BS 6622; GB/T
12706

DATA SCOPE

2 technical table(s) included
for preliminary selection

SELECTION NOTE

Confirm voltage, conductor,
armour, sheath and
installation route.

For quotation review, provide cable type, standard, size, quantity and project destination.

ethan@farwalkcable.com | +86 155 5800 6344

Application & Selection Summary

Typical applications

- Power distribution networks
- industrial plants
- infrastructure projects
- underground or indoor power supply routes
- renewable energy and utility projects requiring project-based cable review.

Selection logic

- Confirm voltage grade, conductor material, armour requirement, insulation/sheath material, installation environment and applicable standard before quotation or production confirmation.

Construction Overview

Item	Website-ready content
Product route	Copper or aluminum conductor with insulation, bedding, optional armour and outer sheath according to product type and project requirement.
Voltage	8.7/15kV, 17.5kV
Conductor	Copper conductor route, confirmed by technical table
Standards	IEC 60502-2; BS 6622; GB/T 12706
Confirmation	Final structure, dimensions and packing should follow selected standard, quotation review and order specification.

Readable Data Index

Data route	Size / rating range	Construction	Diameter / OD	Resistance / weight / rating
1 Core - Cu/XLPE/CTS/PVC Unarmoured (8.7/15kV)	1 x 25 - ripti10 xn 630	See table	22.5 - 50.2	720 - 7550
3 Core - Cu/XLPE/CTS/SWA/PVC Armoured (8.7/15kV)	3 x 25 - 3 x 400	See table	56.5 - 102.5	4850 - 23850

Data boundary: these tables support website launch, quotation review and preliminary product selection. For project execution, final dimensions, electrical performance, packing and compliance documents should be confirmed against the selected project standard and order specification.

1 Core - Cu/XLPE/CTS/PVC Unarmoured (8.7/15kV)

Reference table for preliminary selection and quotation review.

Area (mm ²)	Nom. XLPE Thick. (mm)	Cu Tape Thick. (mm)	Approx OD (mm)	Weight (kg/km)
1 Core - Cu/XLPE/CTS/PVC Unarmoured (8.7/15kV)				
1 x 25	4.5	0.1	22.5	720
1 x 35	4.5	0.1	23.5	840
1 x 50	4.5	0.1	24.8	1010
1 x 70	4.5	0.1	26.5	1250
1 x 95	4.5	0.1	28.2	1550
1 x 120	4.5	0.1	30.0	1850
1 x 150	4.5	0.1	31.5	2180
1 x 185	4.5	0.1	33.5	2580
1 x 240	4.5	0.1	36.2	3220
1 x 300	4.5	0.1	38.5	3900
1 x 400	4.5	0.1	42.0	4850
1 x 500	4.5	0.1	45.5	6050
1 x 630	4.5	0.1	50.2	7550

3 Core - Cu/XLPE/CTS/SWA/PVC Armoured (8.7/15kV)

Reference table for preliminary selection and quotation review.

Area (mm ²)	Nom. XLPE Thick. (mm)	SWA Dia. (mm)	Approx OD (mm)	Weight (kg/km)
3 Core - Cu/XLPE/CTS/SWA/PVC Armoured (8.7/15kV)				
3 x 25	4.5	2.5	56.5	4850
3 x 35	4.5	2.5	58.8	5350
3 x 50	4.5	2.5	62.2	6150
3 x 70	4.5	2.5	66.5	7350
3 x 95	4.5	3.15	71.8	9150
3 x 120	4.5	3.15	75.5	10550
3 x 150	4.5	3.15	79.2	12150
3 x 185	4.5	3.15	83.5	13950
3 x 240	4.5	3.15	89.5	16850
3 x 300	4.5	3.15	94.8	19850
3 x 400	4.5	3.15	102.5	23850