


G-GC 2kV Mining Cable

Mining cable for heavy-duty and flexible power supply routes

G-GC 2kV Mining Cable is prepared for preliminary product selection and quotation review. This product is used in mining and heavy industry where flexibility, abrasion resistance, mechanical stress and operating environment must be reviewed carefully.

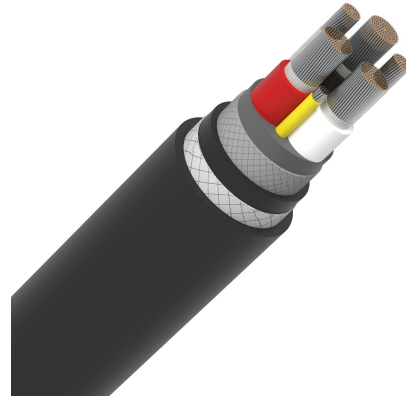

VOLTAGE

2000V

CONDUCTOR

Tinned copper conductor route, confirmed by technical table

TYPICAL USE

Mining equipment

STANDARDS

ICEA S-75-381; NEMA WC 58

DATA SCOPE

1 technical table(s) included for preliminary selection

SELECTION NOTE

Confirm voltage, flexibility, sheath material, flame rating and mechanical stress.

For quotation review, provide cable type, standard, size, quantity and project destination.

ethan@farwalkcable.com | +86 155 5800 6344

Application & Selection Summary

Typical applications

- Mining equipment
- mobile power supply
- tunneling and heavy-duty industrial routes
- flexible connection for harsh operating environments.

Selection logic

- Confirm voltage grade, conductor size, flexibility requirement, sheath material, flame performance and mechanical stress condition before quotation.

Construction Overview

Item	Website-ready content
Product route	Flexible conductor with rubber insulation and heavy-duty sheath. Shielding, pilot core or reinforcement depends on the product type and application.
Voltage	2000V
Conductor	Tinned copper conductor route, confirmed by technical table
Standards	ICEA S-75-381; NEMA WC 58
Confirmation	Final structure, dimensions and packing should follow selected standard, quotation review and order specification.

Readable Data Index

Data route	Size / rating range	Construction	Diameter / OD	Resistance / weight / rating
3-Core G-GC - 2000 Volts (Portable Power)	8 AWG - 4/0 AWG	See table	See table	2.14 - 0.17

Data boundary: these tables support website launch, quotation review and preliminary product selection. For project execution, final dimensions, electrical performance, packing and compliance documents should be confirmed against the selected project standard and order specification.

3-Core G-GC - 2000 Volts (Portable Power)

Reference table for preliminary selection and quotation review.

Size (AWG / kcmil)	Approx. OD (mm)	Approx. Weight (kg/km)	Current Rating @ 90°C (Amps)	Ground Wire Size (AWG)	Max. Cond. Resistance (Ω /km)
3-Core G-GC - 2000 Volts (Portable Power)					
8 AWG	24.2	820	65	12 (x2)	2.14
6 AWG	27.5	1120	87	10 (x2)	1.35
4 AWG	31.8	1650	114	8 (x2)	0.85
2 AWG	36.5	2350	152	7 (x2)	0.54
1 AWG	41.2	3050	174	6 (x2)	0.43
1/0 AWG	44.8	3750	202	5 (x2)	0.34
2/0 AWG	49.5	4650	234	4 (x2)	0.27
4/0 AWG	57.5	6650	315	2 (x2)	0.17