


H07RN-F IEC 60245

Rubber cable for flexible power and industrial connection

H07RN-F IEC 60245 is prepared for preliminary product selection and quotation review. This product is used where flexibility, movement, abrasion resistance and outdoor or industrial operating conditions are part of the cable selection.

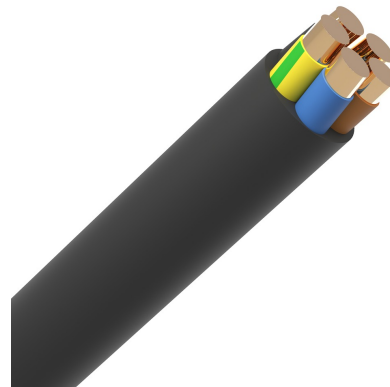

VOLTAGE

450/750V

CONDUCTOR

Flexible copper conductor route, according to product standard

TYPICAL USE

Portable equipment

STANDARDS

IEC 60245-4; EN 50525-2-21; IEC 60228; IEC 66; additional project standards

DATA SCOPE

1 technical table(s) included for preliminary selection

SELECTION NOTE

Confirm voltage, flexibility, sheath material, oil/weather resistance and standard.

For quotation review, provide cable type, standard, size, quantity and project destination.

ethan@farwalkcable.com | +86 155 5800 6344

Application & Selection Summary

Typical applications

- Portable equipment
- construction sites
- welding machines
- industrial power connection
- flexible supply routes exposed to movement or mechanical stress.

Selection logic

- Confirm voltage grade, conductor size, flexibility requirement, sheath material, oil/weather resistance and applicable standard.

Construction Overview

Item	Website-ready content
Product route	Flexible copper conductor with rubber insulation and outer sheath according to the selected product type.
Voltage	450/750V
Conductor	Flexible copper conductor route, according to product standard
Standards	IEC 60245-4; EN 50525-2-21; IEC 60228; IEC 66; IEC 60332-1-2
Confirmation	Final structure, dimensions and packing should follow selected standard, quotation review and order specification.

Readable Data Index

Data route	Size / rating range	Construction	Diameter / OD	Resistance / weight / rating
Heavy Duty Multi-Core Rubber - 450/750V Grade	3 G 1.5 - 4 G 50	3 G 1.5 - 4 G 50	See table	13.3 - 0.39

Data boundary: these tables support website launch, quotation review and preliminary product selection. For project execution, final dimensions, electrical performance, packing and compliance documents should be confirmed against the selected project standard and order specification.

Heavy Duty Multi-Core Rubber - 450/750V Grade

Reference table for preliminary selection and quotation review.

No. of Cores x Cross Section (mm ²)	Nominal Outer Dia. (mm)	Nominal Sheath Thick. (mm)	Approx. Weight (kg/km)	Current Rating @ 30°C (Amps)	Max. Cond. Resistance (Ω/km)
Heavy Duty Multi-Core Rubber - 450/750V Grade					
3 G 1.5	11.2	1.4	190	18	13.3
3 G 2.5	13.2	1.6	275	26	7.98
4 G 4.0	17.0	1.9	485	34	4.95
4 G 6.0	19.5	2.1	650	44	3.30
4 G 10	24.5	2.6	1050	61	1.91
4 G 16	28.5	2.9	1480	82	1.21
4 G 25	34.5	3.3	2150	108	0.78
4 G 35	38.5	3.5	2850	135	0.55
4 G 50	44.5	4.0	3950	168	0.39